

20km 1550Tx/1310Rx SFP Optical Transceiver

Model:GE-LX-SM1550-BD



Features:

- 1 Support 1000BASE-T operation in host systems with SGMII interface.
- 2 Up to 1.25Gbps bi-direction data links.
- 3 Hot-pluggable SFP footprint.
- 4 Fully metallic enclosure for low EMI.
- 5 Low power dissipation (1.05 W typical).
- 6 Compact RJ-45 connector assembly.
- 7 100m transmission over unshielded twisted pair(UTP) Category 5 cable.
- 8 Support UL and RoHS
- 9 Access to physical layer IC via 2-wire serial bus.


Specifications:

Package	Distance	Wavelength	Data Rate	Connector	Operating Voltage	Cable Type
SFP	20KM	TX1550nm/RX1310	1.25Gb/s	LC single	3.3V	Single-Mode(SMF)

Application:

- 1 LAN 1000Base-T(10/100/1000Base-T)
- 2 Switch to switch interface
- 3 Router/Server interface

More Detailed Photos:

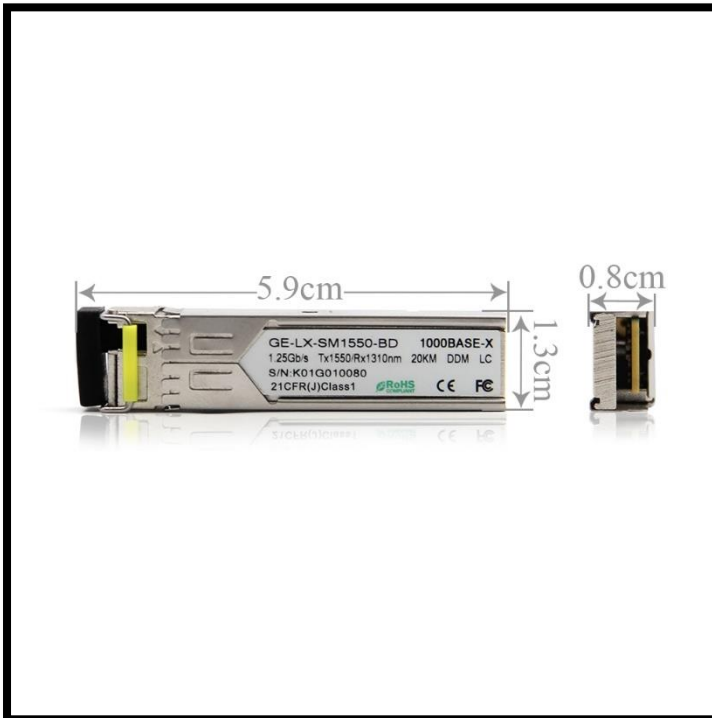

Made in China