


Model: FD-100



Features:

- One key smart discharging, support 2-8s 6-35v discharging with maximum 80W discharging capacity.
- Smart fix current control chip. Discharging current varies from 0.5-6A, automatically cut off after finishing discharging, better protection for your battery.
- Default cut-off voltage and working temperature could be adjusted through sc-linker by PC or by ISDT smart charger.
- Use one of the most commonly used connector - XT60 as discharging port, no need to use adapter.
- Efficient heat dissipation. Pure aluminum passive cooling module, aluminum alloy shell + high speed ball bearing fan.

Specifications:

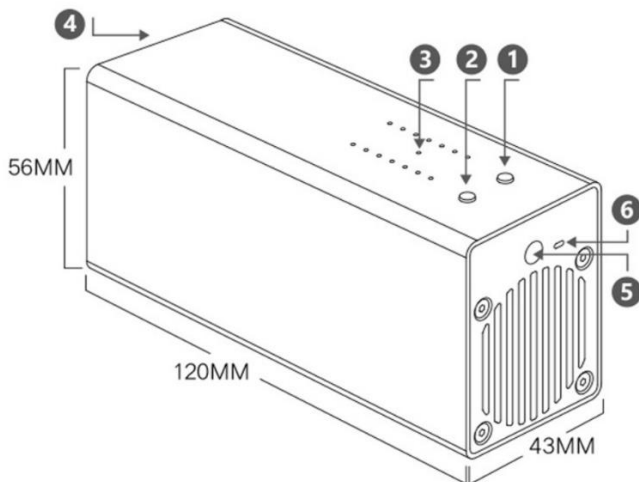

- Minimum input voltage: 6V
- Maximum input voltage: 36V
- Battery cells: 2-8S
- Auto cut off protection: Support
- Abnormal voltage alarm: Support
- Wrong cell setting alarm: Support
- Beeper sound: 80dB
- Dimension: 57mm x 120mm x 43mm
- Weight: 295g
- 1. Current setting, 2. Cells setting, 3. Indicator light, 4. PC port, 5. Beeper

