


Power Relay

Model: JQX-62F 1Z 120A

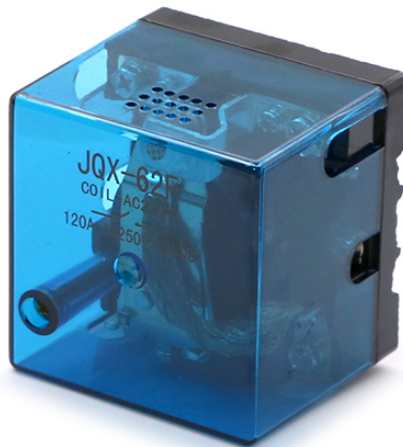

Specification:

Power Relay: JQX-62F 1Z 120A

Coil voltage: 6, 12, 24, 48, 60, 110VDC; 12, 24, 48, 110, **220**VAC

Contact Specification

Contact form	1Z
Contact resistance	$\leq 100M\Omega$ (1A 6VDC)
Contact material	AgSnO ₂
Contact capacity	120A 250VAC/30VDC

Technical Specification

Insulation resistance	$\geq 1000M\Omega$ (500VDC)
Ambient temperature	-40°C ~ +70°C (No condensation)
Dielectric strength	BCC $\geq 2500VAC$ 1min
	BOC $\geq 1000VAC$ 1min
Operate / Release time	$\leq 40ms/25m$
Terminal type	Screw mounting

Coil Specification

Rated coil power	DC2.0W AC4VA
------------------	--------------

Coil Data

Nominal voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Nominal voltage VAC	Operate voltage VAC	Release voltage VAC	Coil resistance $\Omega \pm 10\%$
6	4.80	0.60	18	6	4.80	1.80	9
12	9.60	1.20	70	12	9.60	3.60	36
24	19.20	2.40	290	24	19.20	7.20	144
48	38.40	4.80	1152	48	38.40	14.40	576
60	48.00	6.00	1800	110	88.00	36.00	3025
110	88.00	11.00	6050	220 /240	176.00	72.00	12000/14400

Made in China