

Power Relay

Model:JQX-62F 2Z




Power Relay: JQX-62F 2Z	
Coil voltage: 5, 6, 9, 12, 24, 48, 60VDC; 12, 24, 110, 220VAC	
Contact Specification	
Contact Form	2Z
Contact Resistance	$\leq 100\text{m}\Omega$ (1A 6VDC)
Contact Material	AgCdO
Contact Capacity	80A 250VAC/30VDC
Technical Specification	
Insulation Resistance	$\geq 1000\text{M}\Omega$ (500VDC)
Dielectric Strength	BCC $\geq 2500\text{VAC}$ 1min
	BOC $\geq 1200\text{VAC}$ 1min
Operate / Release Time	$\leq 25\text{ms}/25\text{ms}$
Terminal Type	Screw mounting
Coil Specification	
Rated Coil Power	DC2.0W AC4VA


Coil Data							
Nominal Voltage	Operate Voltage	Release Voltage	Coil Resistance	Nominal Voltage	Operate Voltage	Release Voltage	Coil Resistance
VDC	VDC	VDC	$\Omega \pm 10\%$	VAC	VAC	VAC	$\Omega \pm 10\%$
6	4.8	0.6	18	6	4.8	1.8	9
12	9.6	1.2	72	12	9.6	3.6	36
24	19.2	2.4	290	24	19.2	7.2	144
48	38.4	4.8	1152	48	38.4	14.4	576
60	48	6	1800	110	88	36	3250
110	88	11	6000	220/240	176	72	12000/14400

Outline dimension, Mounting holes(Bottom view), Wiring diagram(Bottom view)


JQX-62F 2Z: Outline dimension(Screw mounting) Mounting holes (Bottom view)

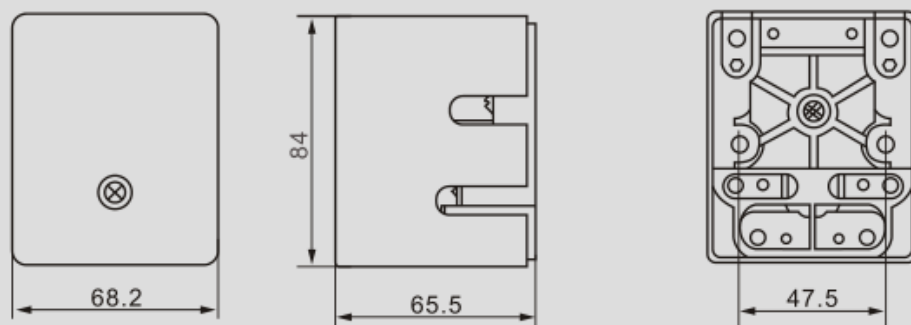

JQX-62FH 2Z: Outline dimension (Din rail type) Mounting holes (Bottom view)

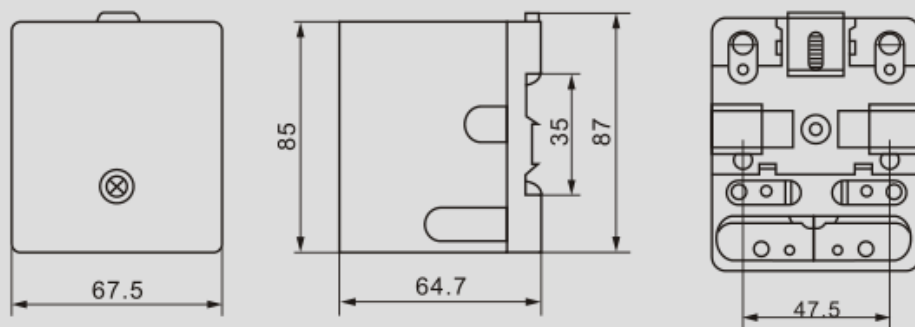

Wiring diagram(Bottom view)

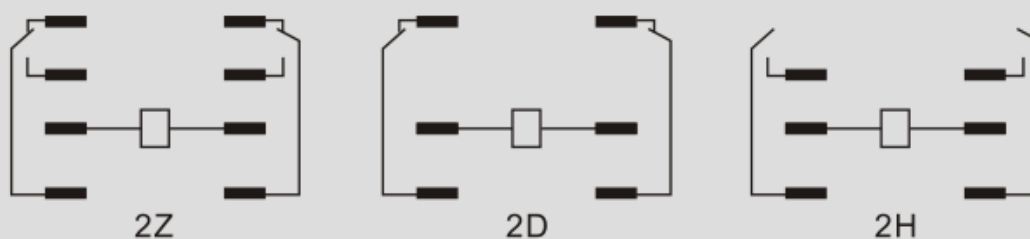

Made in China