

Solid State Relay


Model:SSR-D2440



Specifications:

- ❖ Control Voltage: 3-32VDC 80-250VAC
- ❖ Control Current: 4-20mA 3-20mA
- ❖ Reverse Voltage: 32VDC
- ❖ Guarantee Close Voltage: 1VDC 30VAC
- ❖ Guarantee Opening Voltage: 3VDC 80VAC
- ❖ Load Voltage: 24-240vac 75-480VAC
- ❖ Load Max Current: 5-90A
- ❖ Load Min Current: 0.05A
- ❖ Passing Condition Pressure Drop: $\leq 1.6VAC$
- ❖ Output Leakage Current: $\leq 5mA$
- ❖ Medium Pressure Resistance: $\geq 2000VAC$
- ❖ Frequency Range: 50-60HZ
- ❖ Insulating Resistance: $\geq 100M\Omega$,
- ❖ Operating Temperature: -20-70°C.

More Detailed Photos:

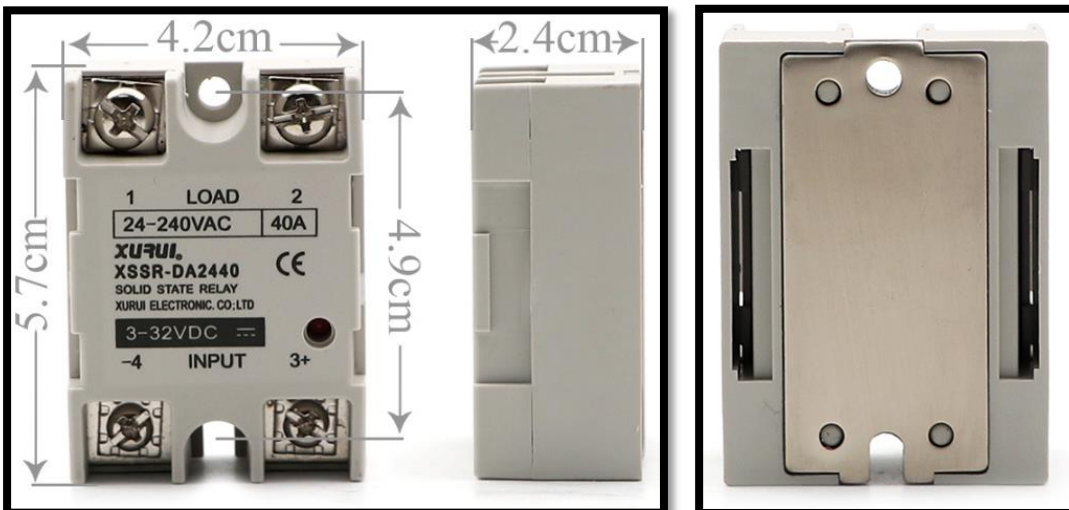

Made in China