

HDTV Distributer Up to 1080/UXGA

Model:CHDD-3



Description:

CHDD-3 is a high performance and versatile distribution amplifier for delivering both HD and SD video with digital/analog audio to your multiple display units.


Features:

- ❖ Component / composite or RGB distribution amplifier.
- ❖ Supports SD (composite, YCbCr) and HDTV (YPbPr, RGSB) input signal.
- ❖ Accepts one component input and split the input to identical and buffered outputs via 3x3 RCA connectors.
- ❖ When input is composite video, it can connect up to 3 different video sources and output three identical and buffered signal for each video input.
- ❖ It can be used for presentation and home theater application.
- ❖ High bandwidth performance - 480MHZ bandwidth at - 3dB.
- ❖ Worldwide power supply.

Specifications:

- Input: YPbPr x 1 or RGSB x 1 (or RGBHV), or composite x 3 1 Vp-p@ 75 ohm
- Output: YPbPr x 3, or RGSB(or RGBHV) x 3, or composite 3 x 3
- Audio Input: Coaxial (S/PDIF) x 1 + R/L x 1
- Audio Output: Coaxial (S/PDIF) x 3 + R/L x 3
- Analog Audio Input / Output: Audio 2 Vrms max 47k ohm.
- Horizontal / vertical sync 5Vp-p max and H frequency 10KHz~100 KHz, V frequency 20Hz~200Hz.
- Bandwidth: 480MHz (-3dB)
- Differential Gain: 0.05%
- Differential phase: 0.05 degree
- Power: 5V 2A~1A
- Dimension:14.1x12.2x3.8cm
- Weight: 550g

More Detailed Photos:

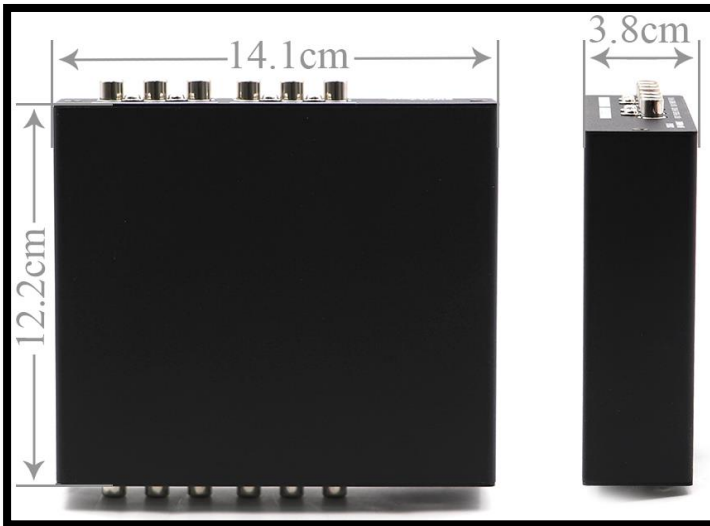

Made in China