

Pneumatic Fitting 5 Way

Model: PK-04




Features:

- Convenient One touch fittings provide instant tubing connections.
- Elliptical release ring facilitates pneumatic installations in confined spaces.
- Light manual pressure on the elliptical release ring is all that is required to instantly disconnect each tube-no special tools required.
- Nickel-plated brass threaded bodies ensures anti-corrosion and anti-contamination.
- All NPT & R(BSPT) thread are pre-coated with Teflon sealant and require no additional sealing.

Specifications:

Media	Air or Vacuum
Operating Pressure	0 ~ 1.0 MPa
Negative Pressure	-750mmHg
Pressure Proof	1.5 MPa
Operating Temperature Range	5 ~ 60C
The Material of Tube	Polyurethane or Nylon

Dimensions:

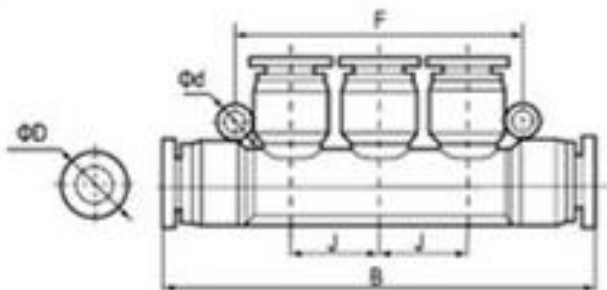

Model	ΦD	B	F	J	Φd
PK-04	4	62.4	36.8	12	2.5