


Patch Panel 25B RJ11

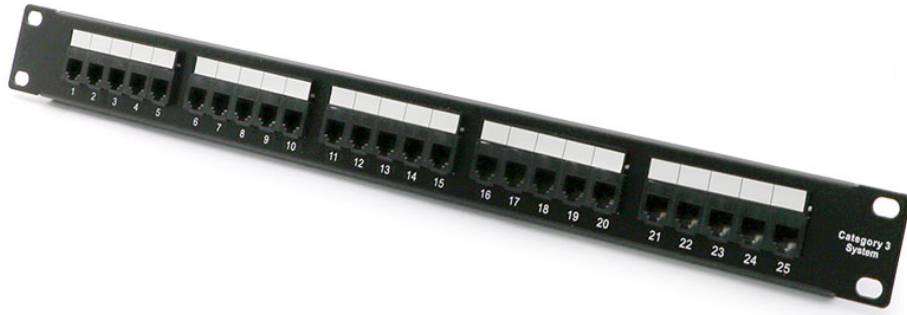

Specifications:

- Meet TIA/EIA-568-A and TIA/EIA-568-B Category 3 requirements.
- Meet TIA/EIA TSB-40
- Meet ISO/IEC Generic Cabling Standard 11801
- Meet CENELEC Generic Cabling Standard EN50173
- Angle: 90°
- Termination: 110 IDC Type
- Port: 25
- Color: Black
- Size: 48.3 x 4.5 x 1.1 cm

Electrical:

- Current rating: 1.5 Amp Max.
- Voltage rating: 150 Volts
- Contact resistance: 20 m-ohm
- Insulation Resistance: 500M-ohm
- Dielectric Withstand Voltage: 1000 V AC RMS, 60Hz 1min

Materials:

- Housing: PC UL94V-0
- IDC: PC UL94V-0, Accept 22-26 AWG Solid Wire.
- PCB: FR4 1.6mm thickness, 2 layers
- Contact: PC UL94V-0, 0.45mm diameter Phosphor bronze with 3 u" to 50 u" Gold plating on contact area.



Made in China