

Panel Meter Digital DA 500A/75MV

Model:D69-50



Features:

1. Good stability, High Measurement Accuracy, Strong anti-interference capability.
2. Standard size, easy to mount.
3. AC/DC 8-12V operating voltage, with Reverse connection protection.


Specifications:

- Measuring Range: DC 500/75mV
- Operating Voltage: AC/DC 8~12V
- Display Mode: LCD, Blue Backlight, 3 1/2 Digits
- Character Height: 20mm
- Overall Dimension: 78*43*25mm
- Mounting Dimension: 76*39mm
- Speed Measurement: ≥ 2 times/sec.
- Over Range Display: the first digit display "1", the latter three digits don't display
- Operating Temperature: -10°C~+50°C
- Operating Humidity: 10%~80% (No Condensation of Moisture)
- Operating Air Pressure: 80~106kPa
- Solar Radiation: No Direct Radiation
- Exterior Shape: rectangle
- Weight: 60g


Note:

1. the power supply don't differentiate between anode and cathode.
2. The power supply end and the measurement end should be isolated (that is they are not common grounded, no any connection); the meter cannot measure its own power supply and current, or else will burning-out.
3. We do not recommend that two or more meters share one power supply!

Dimensions:

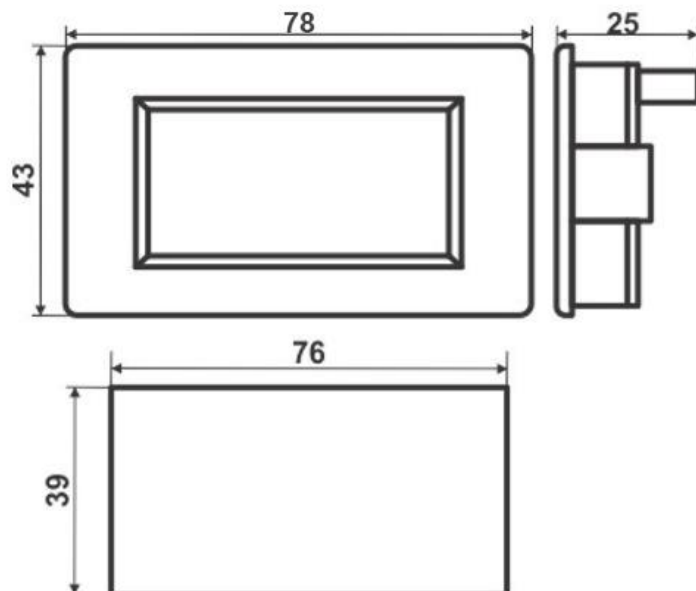

Wiring:

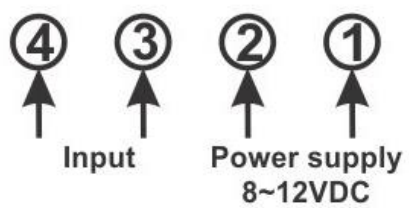

Made in China