

Stepper Motor


Model: 28BYJ-48




Parameters:

- Rated voltage : 5VDC
- Number of Phase : 2
- Speed Variation Ratio : 1/64
- Stride Angle : 5.625° /64
- Frequency: 100Hz
- DC resistance : 200Ω±7% (25°C)
- Idle In-traction Frequency: > 500Hz
- Idle Out-traction Frequency: > 1000Hz
- In-traction Torque >34.3mN.m (120Hz)
- Self-positioning Torque >34.3mN.m
- Friction torque: >380 gf. cm
- Pull in torque: 350 gf. cm
- Insulated resistance >10MΩ (500V)
- Insulated electricity power : 600VAC/1mA/1s
- Insulation grade: A
- Noise <40dB (120Hz, No load, 10cm)
- Color: Silver
- Diameter: 25mm
- Suitable for guide wind deflector, portable air conditioner valve, etc.

Mechanical Dimensions:

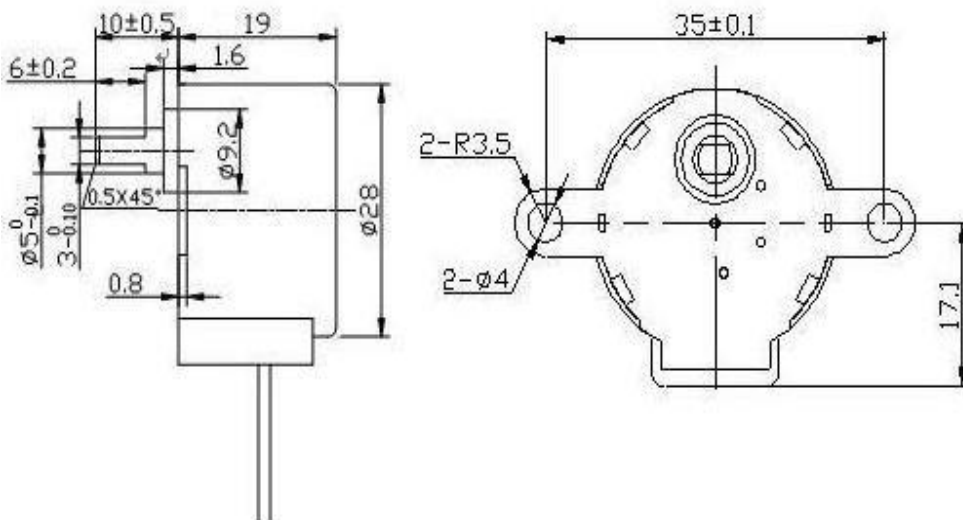

Wring Diagram:

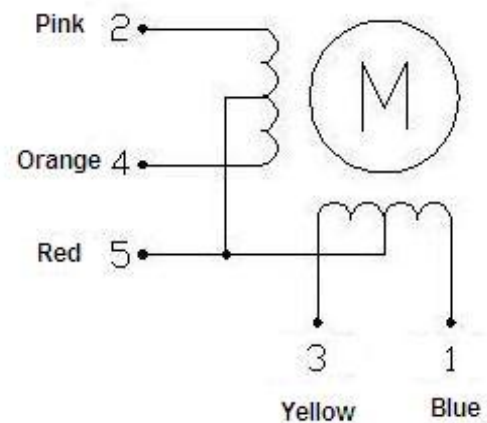

Made in China