


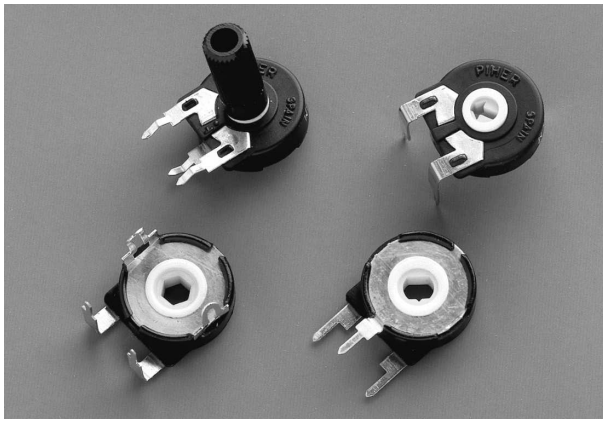

FEATURES

- Carbon resistive element.
- Dust proof enclosure.
- Polyester substrate.
- Also upon request:
 - Wiper positioned at 50% or fully clockwise.
 - Long life model for low cost control pot. applications
 - Low torque option
 - Supplied in magazines for automatic insertion.
 - Self extinguishable plastic UL 94V-0
 - Cut track option
 - Special Tapers
 - Mechanical detents

MECHANICAL SPECIFICATIONS

- Mechanical rotation angle: $265^\circ \pm 5^\circ$
 $240^\circ \pm 5^\circ$ available under drawing (blue housing only)
- Electrical rotation angle: $240^\circ \pm 20^\circ$
- Torque: 0.5 to 2.5 Ncm.
(0.7 to 3.4 in-oz)
- Stop torque: > 10 Ncm. (> 14 in-oz)
- Life: up to 200K cycles

ELECTRICAL SPECIFICATIONS

- Range of values (*)
 $100\Omega \leq R_n \leq 5\text{ M}$ (Decad. 1.0 - 2.0 - 2.2 - 2.5 - 4.7 - 5.0)
- Tolerance (*): $100\Omega \leq R_n \leq 1\text{M}\Omega$ $\pm 20\%$
 $1\text{M}\Omega < R_n \leq 5\text{M}$ $\pm 30\%$
- Max. Voltage: 250 VDC (lin) 125 VDC (no lin)
- Nominal Power 50°C (122°F) (see power rating curve)
0.25 W (lin) 0.12 W (no lin)
- Taper (*) (Log. & Alog. only $R_n \geq 1\text{K}$) Lin ; Log; Alog.
- Residual resistance(*): $\leq 0.5\%$ R_n (5Ω min.)
- Equivalent Noise Resistance: $\leq 3\%$ R_n (3Ω min.)
- Operating temperature**: $-25^\circ\text{C} + 70^\circ\text{C}$ ($-13^\circ\text{F} + 158^\circ\text{F}$)

* Others upon request

** Up to 85°C depending on application

HOW TO ORDER

PT-15	L	H01	223	A	2020	OPTIONAL EXTRAS						S		
Series PT-15	Code H01 H05 H25 H06 H02 H10 V02 V12 V15 V17 V18 V24 V21 V22 V23	Mounting Method H2.5 H5 HC5 B H2.5P H5P V12.5 VA V15 V17.5 D VD15 V12.5P VAP V15P	Taper A = Lin. B = Log. C = Alog.	Life E = Long life U = Extra Long life (See note 5)	Value 101 = 100 Ω 223 = 22 K 504 = 500 K 505 = 5 M (See note 3)	Tolerance 2020 = $\pm 20\%$ 3030 = $\pm 30\%$ (See note 4)	Detent See PT's with detents data sheet	Flammability I = non flammable (See note 6)	Wiper position PM = 50% PF = Final	Shaft/rotor colour RO=Red NE=Black VE=Green AM=Yellow AZ=Blue MA=Brown GR=Grey NA=Orange CR=Cream (See note 7)	Magazine T (See note 9)	Torque – = Standard L = Low torque (See note 8)	Cut track PCI = Initial PCF = Final	Shaft Thum. 01 – Fig. 1 28 – Fig. 28 (See note 10)

(See note 1) (See note 2) (See note 3) (See note 4) (See note 5) (See note 6) (See note 7) (See note 8) (See note 9) (See note 10)

NOTES:

- (1) "Z" adjustment only available on "H" versions. Standard colour for the "T" rotor: Orange
- (2) Terminal styles: "P" are crimped terminals. V24 not available with steel terminals. V=Vertical adjust; H=Horizontal Adjust
- (3) Value Example: Code: 10 1 100 Ω
Numb of zeros
First two digits of the value.
- (4) Non standard tolerance, upon request. Example: +7% -5% Code: 07 05
negative tolerance
positive tolerance
- (5) Life
 - Standard 500 cycles
 - Long life 10000 cycles
 - Extra Long life 100000 cycles (to be studied case by case)
- (6) Non flammable: housing, rotor and shaft. According to UL 94V-0
- (7) Colour shaft/rotor:
 - Potentiometer without shaft: only rotor
 - Potentiometer with shaft: only shaft
 - Cream colour only available in standard plastic
- (8) Low Torque: $\leq 1.5\text{Ncm}$. No detent option available for low torque models
- (9) Magazines (35 pcs/mag): available for VA (12.5), V (12.5), V (15), V15 (P) and H models.
For more information please contact your nearest Piher supplier.
- (10) If you wish to use your own custom plastic shaft/knob/actuator please contact Piher for advice about compatible materials.

NOTE: The information contained here should be used for reference purposes only.


HOW TO ORDER CUSTOM DRAWING

PT-15 LH 01 + DRAWING NUMBER (Max. 16 digits)


This way of ordering should be used for options which are not included in the "How to order" standard and optional extras.

STANDARD OPTIONS


Cut track		No
Detents		None
Non flammable		No
Rotor colour		White
Shaft colour		Natural
Wiper position		Initial
Torque		Standard

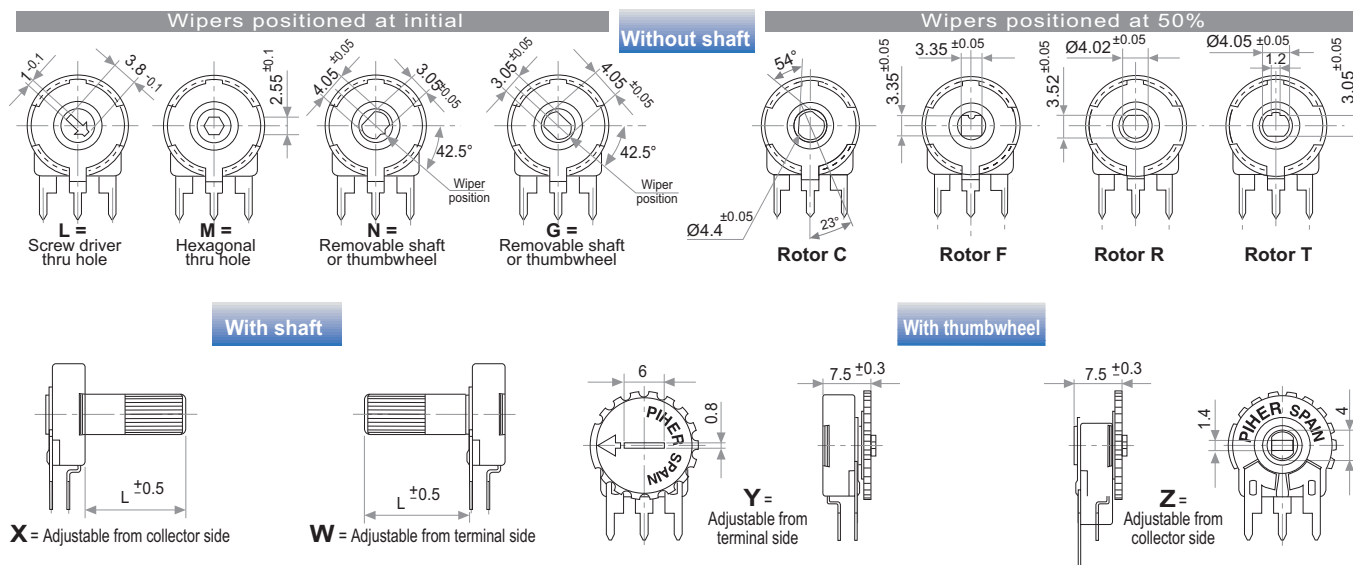


VERTICAL MOUNT - HORIZONTAL ADJUST

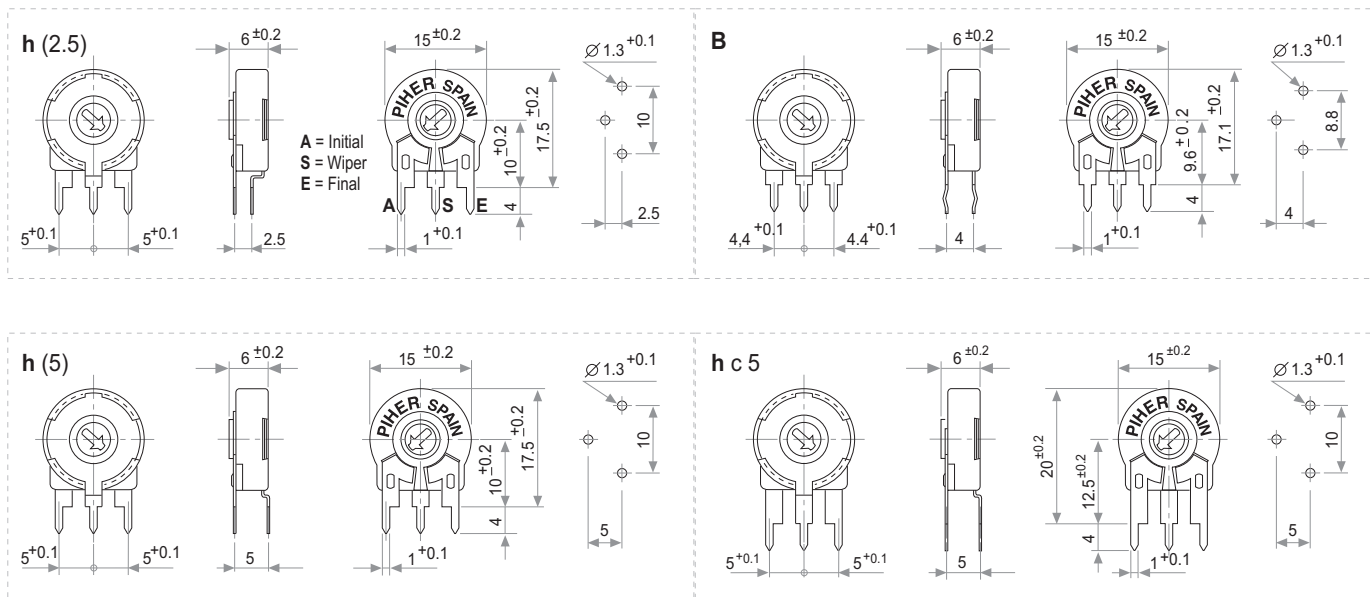


HORIZONTAL MOUNT - VERTICAL ADJUST

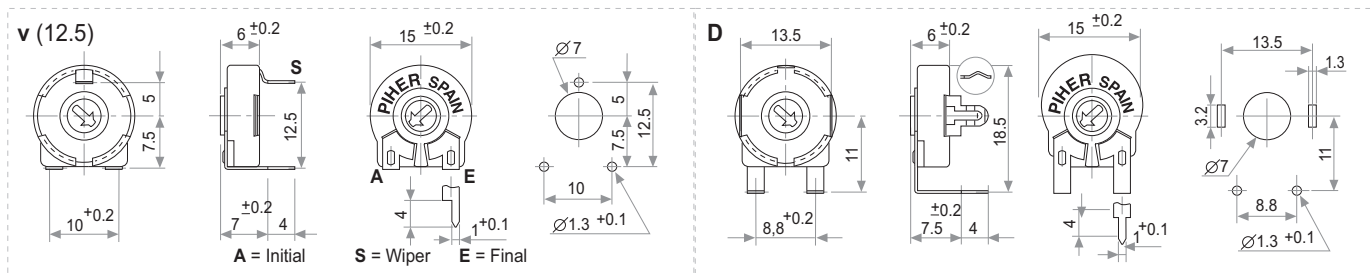


HORIZONTAL MOUNT - VERTICAL ADJUST

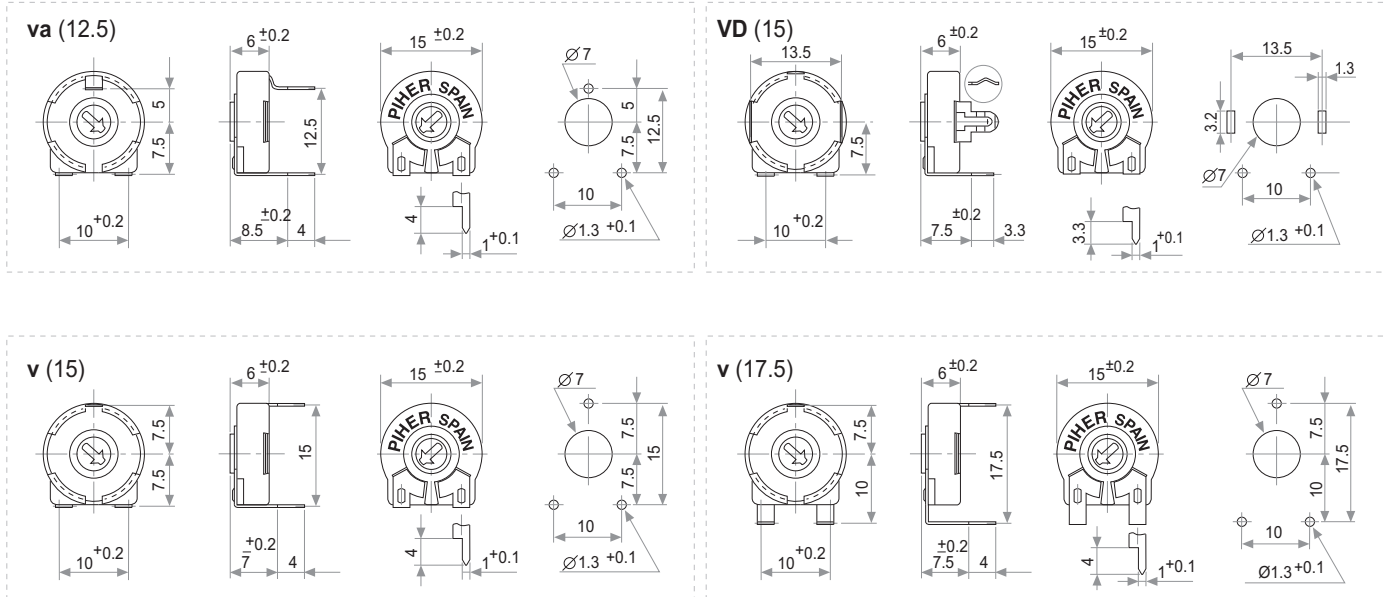

CRIMPED TERMINALS (DETAIL)


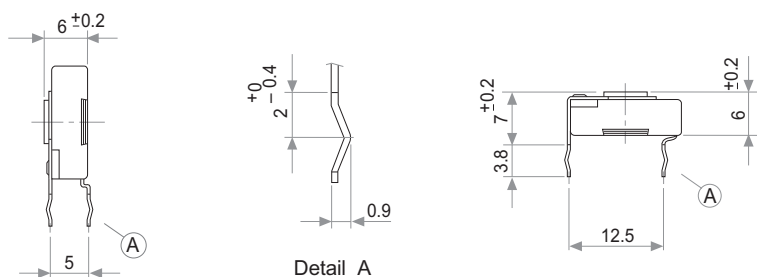


POWER RATING CURVE

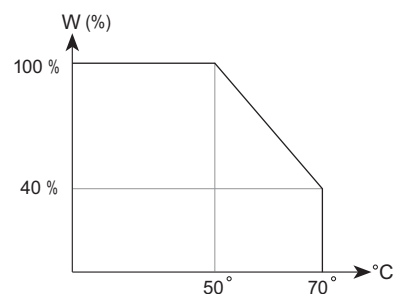

TAPERS


NOTE: Please note terminals disposition when ordering non linear curves.

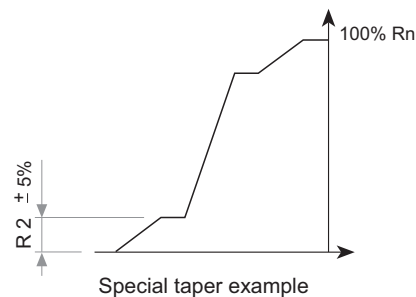

OPTIONS

Positioning


P.M.
50% ±20°




Std. Position = CCW

Cut Track

CCW on-off (A)



A = Initial
S = Wiper
E = Final



CW on-off (E)



TESTS


TYPICAL VARIATIONS

ELECTRICAL LIFE	1.000 h. @ 50°C; 0.25 W	±5 %
MECHANICAL LIFE (CYCLES)	500 @ 10 CPM ...15 CPM	±3 % (Rn < 1 MΩ)
TEMPERATURE COEFFICIENT	-25°C; +70°C	±300 ppm (Rn <100 K)
THERMAL CYCLING	16 h. @ 85°C; 2h. @ -25°C	±2.5 %
DAMP HEAT	500 h. @ 40°C @ 95% HR	±5 %
VIBRATION (for each plane X,Y,Z)	2 h. @ 10 Hz. ... 55 Hz.	±2 %

NOTE : Out of range values may not comply these results.

SHAFTS

Hollow model shafts

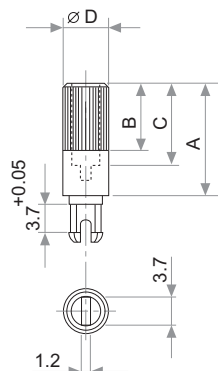

A = Length (FRS)
B = Knurling length
C = Hollow depth
D = Shaft diameter
FRS = From rotor surface

FIG.	A	B	C	D	Ref.
1	12	9	8	6	5272
2	19	9	15	6	5214
5	9.5	6.5	5.5	6	5208
9	35	9	31	6	5216
10	37.8	9	33.8	6	5218
11	35	25	15	6	5209
13	7.8	4.8	3.8	6	5265

Solid model shafts

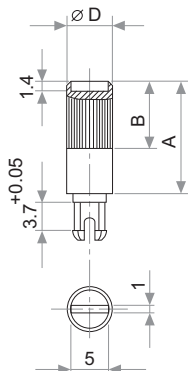
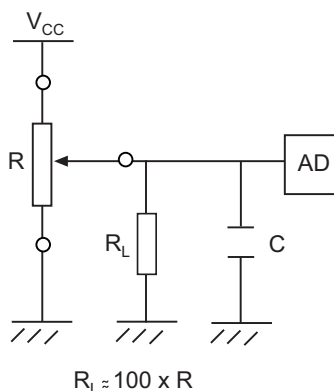


FIG.	A	B	D	Ref.
6	15	9	6	5219
7	16.8	9	6	5220
8	25.3	9	6	5207
12	46	5	6	5227

Slot (1 x 1.4) perpendicular to wiper position. Fig. 12 slot is on line with wiper position.

RECOMMENDED CONNECTIONS

Recommended connection scheme for Piher's position sensors (voltage divider)






Fig. 3 / Ref. 5372

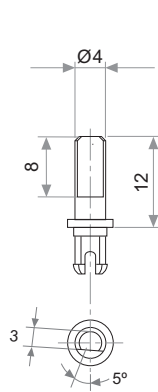


Fig. 15 / Ref. 5217

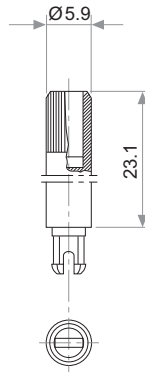


Fig. 17 / Ref. 5210

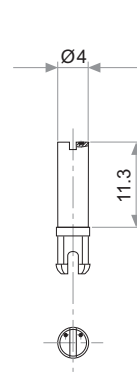


Fig. 18 / Ref. 5271

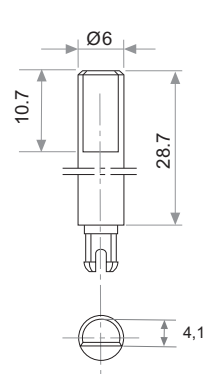


Fig. 19 / Ref. 6032*

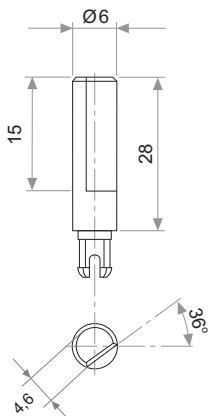


Fig. 20 / Ref. 5369*

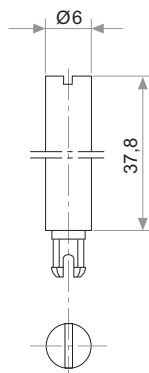


Fig. 21 / Ref. 6031*

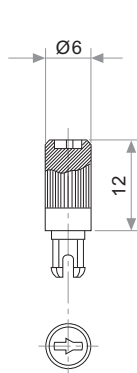


Fig. 22 / Ref. 6029

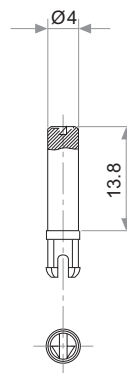


Fig. 23 / Ref. 6022




Fig. 29 / Ref. 6162




Fig. 25 / Ref. 6059




Fig. 27 / Ref. 5268*




Fig. 28 / Ref. 6055

* Not available in self extinguishable plastic

THUMBWHEEL




Fig. 4 / Ref. 5371

Made in China