

SOLID STATE RELAY Model:SSR-25DD



Specifications:


Input Voltage: 5-32VDCOutput Voltage: 5-60VDCOutput Current: 25A


- On Voltage: ≤1V

- One-off Time: ≤10ms

- Off Leakage Current: ≤2mA

- Weight: 0.099kg



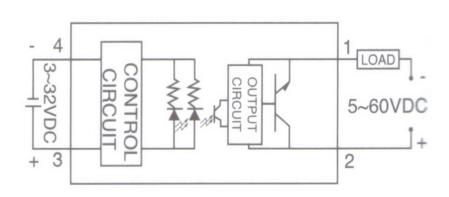

Made in China