


THREE LINE VOLTMETER 0.36" DC 0V-30V LED DISPLAY

Model:DSN-DVM-368

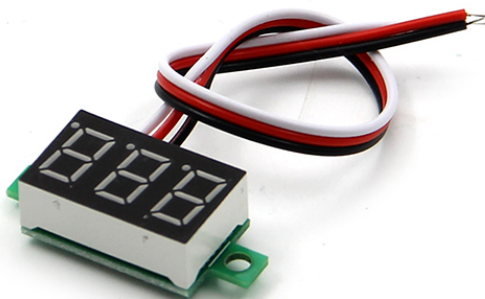


Features:

- Three-wire DC digital voltmeter 0.36 inch LED display
- Low cost, high accuracy to meet most application requirements
- Low start voltage, minimum 5.0V
- Having reverse protection

Technical Parameters:

Measuring range	0.00V-30.0V
Power range	DC4.7-30.0V
Maximum input	DC30.0V, Note: if the input voltage is higher than 30V, this could cause permanent damage!
Allowable error	$\pm 1\%$; greater than or equal 10V when the error is $\pm 0.3V$; less than 10V when the error is ± 0.10
Input resistance	$> 100K$ Euro
Working current	$<18mA$
Refresh rate	About 300mS time
Display method	Three 0.36 " LED digital tube
Display color	Green
Lead Length	22mm
Dimensions	33x14x8 mm (Length x Width x Thickness) excluding the ears; including installation ear length: 33mm
Secure Dress hole	Pitch: 28mm, Aperture: 2.8mm
Operating temperature	$-10^{\circ}C \sim +65^{\circ}C$

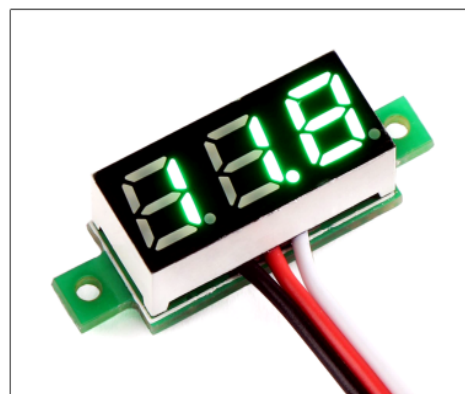

Made in China