


AC Current Transformer 400A/5A

Model: LCTA97C2

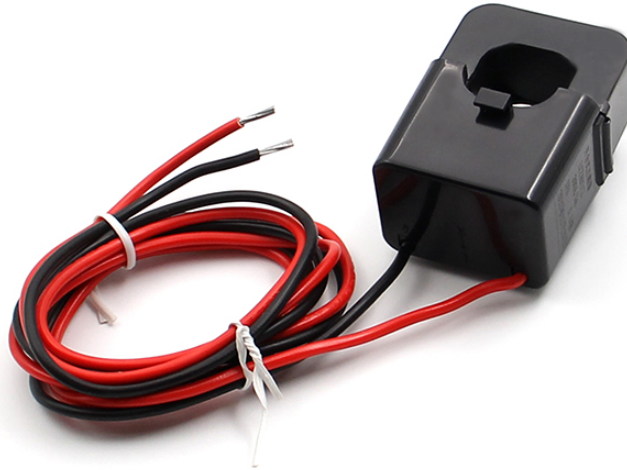

Features:

- Miniature opening and closing current transformer
- Snap-on type
- Built-in input coil
- Voltage isolation capability, safe and reliable
- Can be directly fixed to the cable with a nylon cable tie
- Small and lightweight


Application scope:

- Supports AC 220V 380V power lines
- Supports 5A power meter (Opening and closing transformers can facilitate the installation of meters when the main circuit is not powered)
- Common 5A power meters: 1.5(6)A, 2.5(5)A, 3(6)A single-phase, three-phase energy meters

Specifications:

Input rated current	400A
Output rated current	5A
Accuracy	≤1%
Load number	<1.2 times
Pressure	≤1KV
Capacity	≤1VA
Working temperature	-40°C ~ +85°C
Relative humidity	≤90% @40°C
Operating frequency range	50Hz ~ 60Hz
Insulation heat resistance	Class B (130°C)
Insulation resistance	>1000MΩ in normal state
Anti-electric strength	Can withstand industrial frequency 1000V/1 minute
Flame retardance	Meet UL94-Vo level

Outline Drawing & Installation Size:

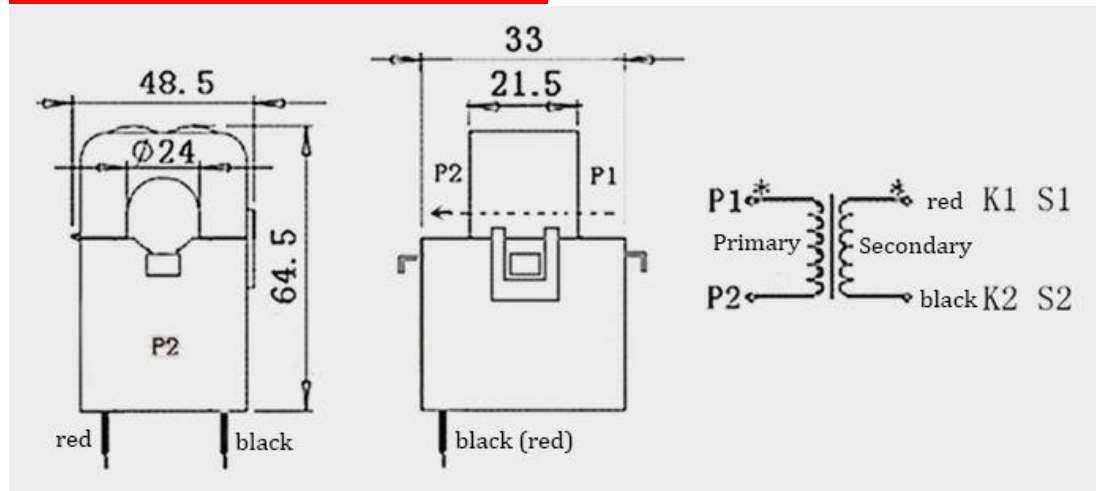

Made in China