

Digital Panel Meter 4~20mA




Features:

- Can directly input electronic ruler, displacement sensor, angle meter, pull-wire potentiometer.
- Can be used to display parameters such as length, thickness, angle etc.
- Have the function of setting range and decimal point.
- It has the function of zeroing the display value of the instrument at any position of the electronic scale or potentiometer. It can set a certain upper limit setting value, and has an upper limit alarm control output. It adopts digital tube display and has a beautiful appearance.

Specifications:

- Power Supply Voltage: AC220V/110V
- Exterior Size (HxWxL): 48x96x110mm
- Installation Opening Size (HxW): 44x92mm

Dimensions:

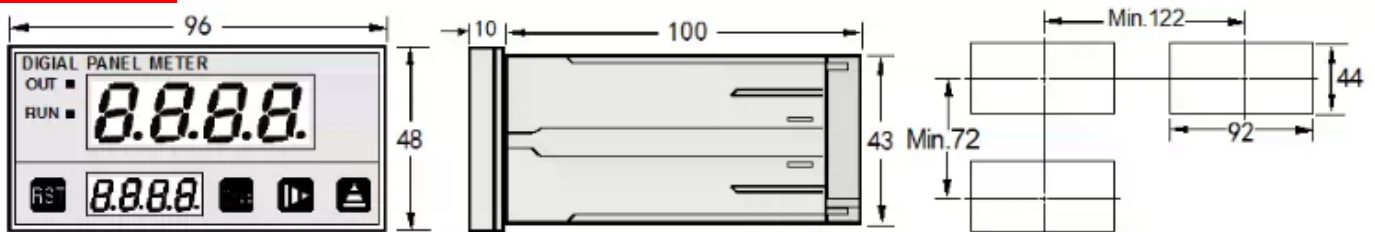


Input Wiring:

The input and output use terminal blocks, which are reliable and convenient.

OUT2 is the upper limit alarm output, OUT1 is the lower limit alarm output,

INPUT is connected to the connection of the sensor, and the HOLD external button has the function of setting the display value to zero, as shown in the figure below:

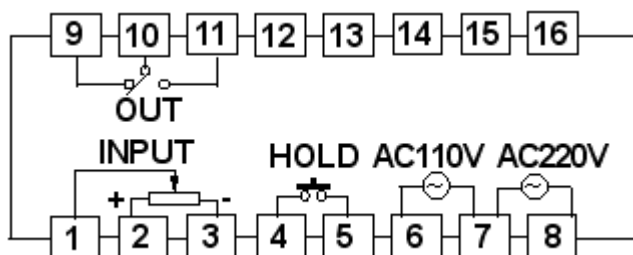

Made in China